



Characteristic curves


Motor protection tripping characteristics for 3RW44 (with symmetry)

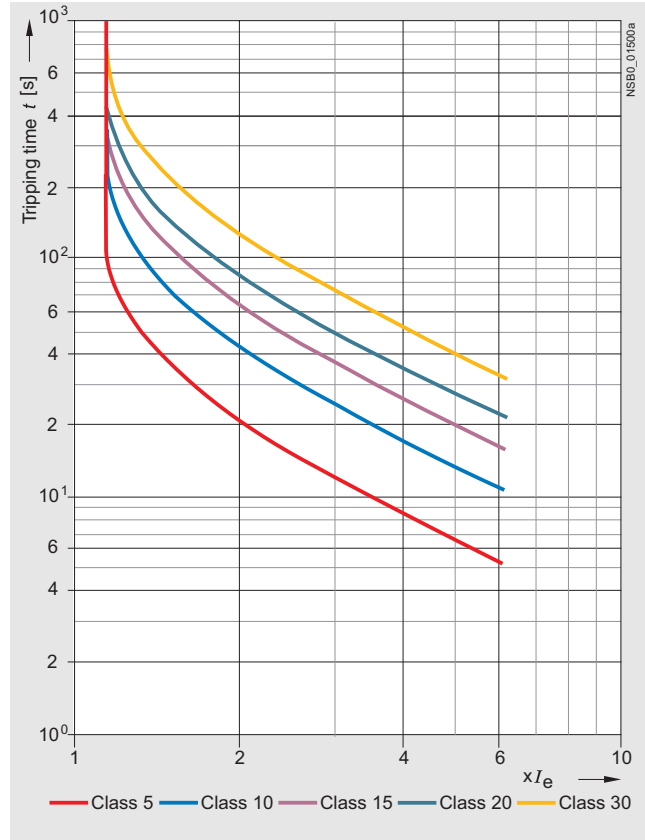

Motor protection tripping characteristics for 3RW44 (with asymmetry)

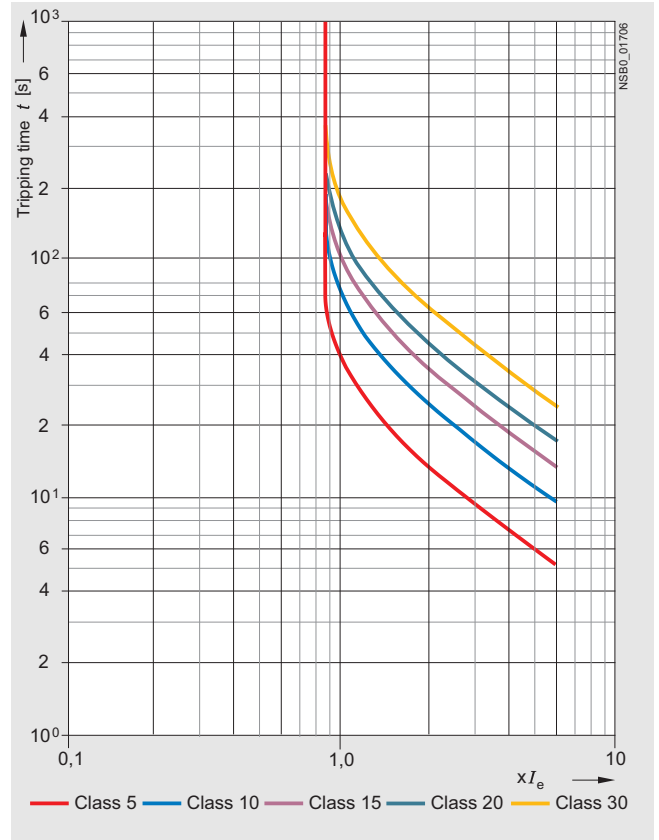

Permissible installation height

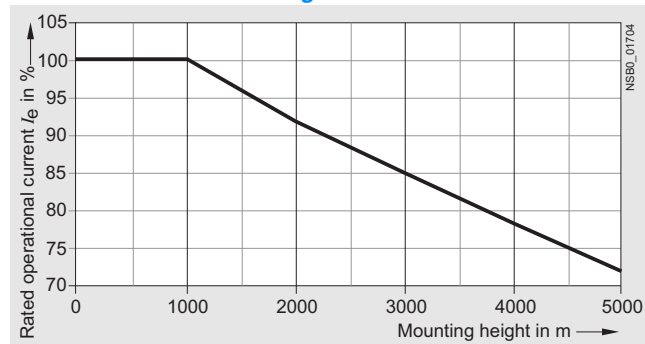

At an installation height above 2000 m, the max. permissible operational voltage is reduced to 460 V.