




Dimensional drawings

LV HRC fuse links, operational class gG

Sizes 000 to 3 and 4a



Size 4 (IEC design)

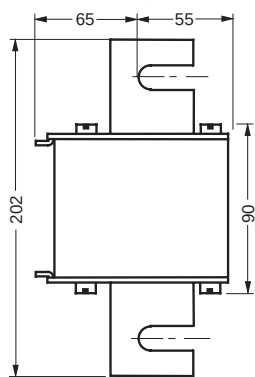


Sizes	I_n	U_n	Type	Dimensions				
	A	V		b	h ₁	h ₂	t ₁	t ₂
000	2 ... 100	500 V AC/250 V DC	3NA3 8../-7	21	54	80	45	8
	2 ... 35	690 V AC/250 V DC	3NA3 8../-6					
	2 ... 100	500 V AC/250 V DC	3NA6 8..					
	10 ... 100	400 AC	3NA6 8../-4					
	2 ... 35	690 V AC/250 V DC	3NA6 8../-6					
	10 ... 100	500 V AC/250 V DC	3NA7 8..					
	2 ... 35	690 V AC/250 V DC	3NA7 8../-6					
00	35 ... 160	500 V AC/250 V DC	3NA3 8..	30	54	80	45	14
	40 ... 100	690 V AC/250 V DC	3NA3 8../-6					
	80 ... 160	500 V AC/250 V DC	3NA6 8../-7					
	80 ... 160	400 AC	3NA6 8../-4 (KK)					
	40 ... 100	690 V AC/250 V DC	3NA6 8../-6					
	80 ... 160	500 V AC/250 V DC	3NA7 8../-7					
	40 ... 100	690 V AC/250 V DC	3NA7 8../-6					
0	6 ... 160	500 V AC/440 V DC	3NA3 0..	30	67	126	45	14
1	16 ... 160	500 V AC/440 V DC	3NA3 1..	30	75	137	50	15
	50 ... 160	690 V AC/440 V DC	3NA3 1../-6					
	16 ... 160	500 V AC/440 V DC	3NA6 1..					
	35 ... 160	400 AC	3NA6 1../-4					
	50 ... 160	690 V AC/440 V DC	3NA6 1../-6					
	16 ... 160	500 V AC/440 V DC	3NA7 1..					
	50 ... 160	690 V AC/440 V DC	3NA7 1../-6					
	200 ... 250	500 V AC/440 V DC	3NA3 1..	47	75	137	51	9
	200	690 V AC/440 V DC	3NA3 1../-6					
	200 ... 250	500 V AC/440 V DC	3NA6 1..					
	200 ... 250	400 AC	3NA6 1../-4					
	200	690 V AC/440 V DC	3NA6 1../-6					
	200 ... 250	500 V AC/440 V DC	3NA7 1..					
	200	690 V AC/440 V DC	3NA7 1../-6					
2	35 ... 250	500 V AC/440 V DC	3NA3 2..	47	75	151	58	10
	80 ... 200	690 V AC/440 V DC	3NA3 2../-6					
	35 ... 250	500 V AC/440 V DC	3NA6 2..					
	50 ... 250	400 AC	3NA6 2../-4					
	80 ... 200	690 V AC/440 V DC	3NA6 2../-6					
	35 ... 250	500 V AC/440 V DC	3NA7 2..					
	80 ... 200	690 V AC/440 V DC	3NA7 2../-6					
	300 ... 400	500 V AC/440 V DC	3NA3 2..	58	74	151	59	13
	224 ... 250	690 V AC/440 V DC	3NA3 2../-6					
	300 ... 400	500 V AC/440 V DC	3NA6 2..					
	300 ... 400	400 AC	3NA6 2../-4					
	224 ... 315	690 V AC/440 V DC	3NA6 2../-6					
	300 ... 400	500 V AC/440 V DC	3NA7 2..					
	224 ... 315	690 V AC/440 V DC	3NA7 2../-6					
3	200 ... 400	500 V AC/440 V DC	3NA3 3..	58	74	151	71	13
	250, 315	690 V AC/440 V DC	3NA3 3../-6					
	425 ... 630	500 V AC/440 V DC	3NA3 3..	71	74	151	70	13
	355 ... 500	690 V AC/440 V DC	3NA3 3../-6					
4	630 ... 1250	500 V AC/440 V DC	3NA3 4..	See adjacent drawing				
4a	500 ... 1250	500 V AC/440 V DC	3NA3 6..	102	97	201	95	20

BETA Protecting

Low-Voltage Fuse Systems

LV HRC fuse links

LV HRC fuse links, operational class aM



Sizes	I_n	U_n	Type	Dimensions				
	A	V		b	h_1	h_2	t_1	t_2
000	6 ... 80	500 AC	3ND1 8..	21	54	80	45	8
00	100 ... 160			30	54	80	45	14
1	63 ... 100	690 AC	3ND2 1..	30	75	137	50	15
	125 ... 250			47	75	137	51	9
2	125 ... 250	690 AC	3ND2 2..	47	75	151	58	10
	315 ... 400			58	74	151	59	13
3	315 ... 400	690 AC	3ND2 3..	58	74	151	71	13
	500, 630		3ND1 3..	71	74	151	70	13