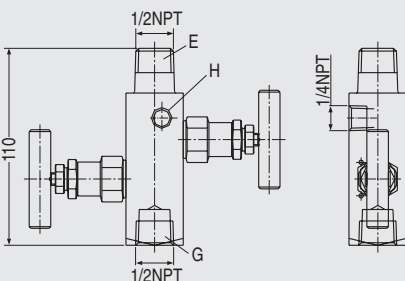
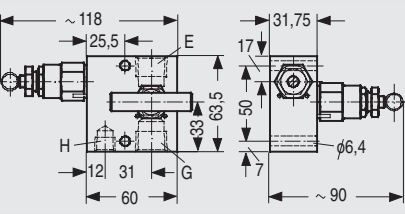
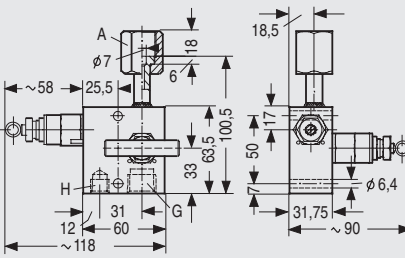


Measuring instruments for pressure


Fittings

Shut-off valves for pressure gauges and pressure transmitters

Ordering data

	Material of valve housing Abbreviated name	Mat. No.	Max. operating pressure	Order No.	Approx. kg
Double shut-off valve DN 5 (sleeve-collar) 	X 2 CrNiMo 17 132	1.4404	420 bar	7MF9011-4FA	1
Double shut-off valve DN 5 (sleeve- sleeve) 	X 2 CrNiMo 17 132	1.4404	420 bar	7MF9011-4DA	1.2
Double shut-off valve DN 5 (sleeve-nipple connection) 	X 2 CrNiMo 17 132	1.4404	420 bar	7MF9011-4EA	1.4

- A Connection on device side: nipple to DIN 16 284, G $\frac{1}{2}$, SW27
 E Connection on device side $\frac{1}{2}$ -14 NPT
 G Connection on measurement side: $\frac{1}{2}$ -14 NPT
 H Vent and test connection $\frac{1}{4}$ -18 NPT

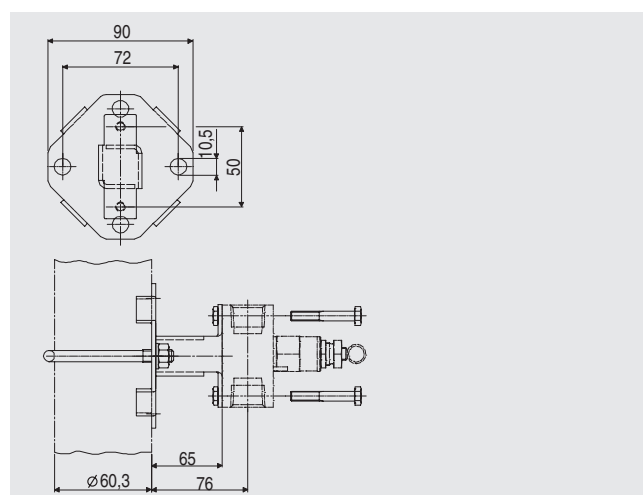

Ordering data

Material

Order No.

Mounting set comprising:

- 1 mounting bracket
- 2 hexagon screws M 6 × 40
- 1 mounting clip
- 2 washers 8.4 DIN 125
- 2 hexagon nuts M8 DIN EN 24 032

Stainless
steel

7MF9011-8AB

Fig. 1/114 Mounting bracket for wall, rack or pipe mounting, dimensions for 7MF9011-4EA and -4DA, dimensions